

NEW SOLUTIONS FOR HYDROGEN PRESSURE-VESSEL MANUFACTURERS

Huntsman Advanced Materials offers innovative solutions that support manufacturers in the design and production of composite pressure vessels for hydrogen storage and transportation. This includes high-performance resin systems complemented by extended material characterization, processing expertise, and process simulation.



Sébastien Panthu
New Business Development - composites
Huntsman Advanced Materials

ALL EYES ON HYDROGEN

The 2020s will be a decade of change, with governments worldwide implementing ambitious hydrogen strategies to help meet emissions targets. Hydrogen costs are expected to drop significantly as production capacity increases, enabling hydrogen-powered fuel cell vehicles (FCEV) to become a cost-competitive, zero-emission solution for applications requiring long range and fast charging times.

Beyond road vehicles, hydrogen is also generating interest in aerospace, rail, and maritime sectors. Composite pressure vessels will play a key role in hydrogen storage, whether within vehicles or for transport and distribution, in order to build a cost-competitive hydrogen infrastructure.

SUPPORTING MANUFACTURERS WORLDWIDE

Huntsman Advanced Materials is a leading global supplier of epoxy resin solutions for filament-wound composite type 3, type 4, and even type 5 pressure vessels. With a comprehensive range of epoxy-based resin systems, our solutions are trusted worldwide for material performance, efficient manufacturing and increased productivity.



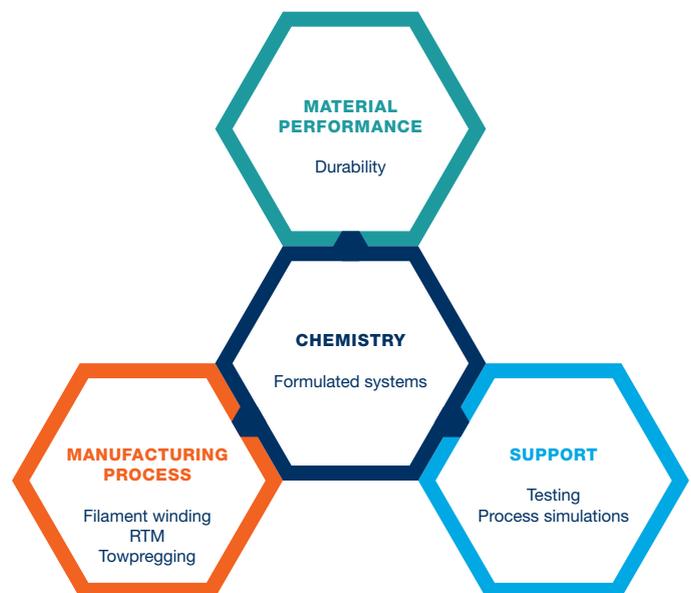


Figure 1: Huntsman Advanced Materials offers a suite of products and services for pressure vessel manufacturers

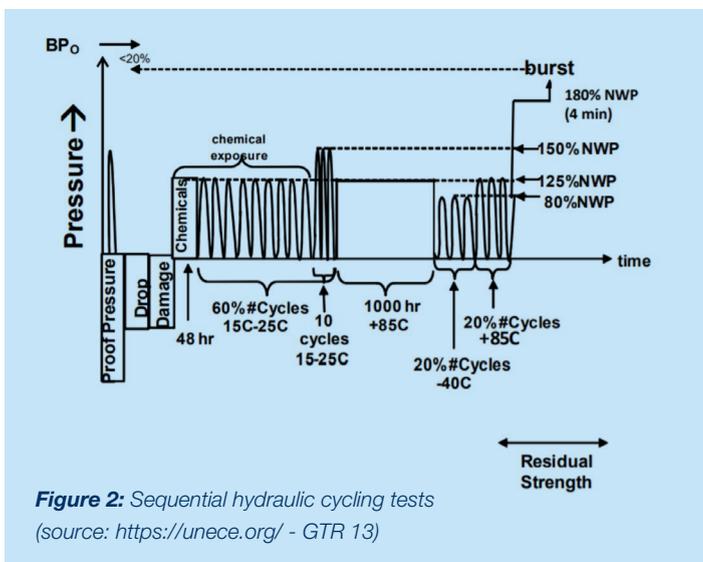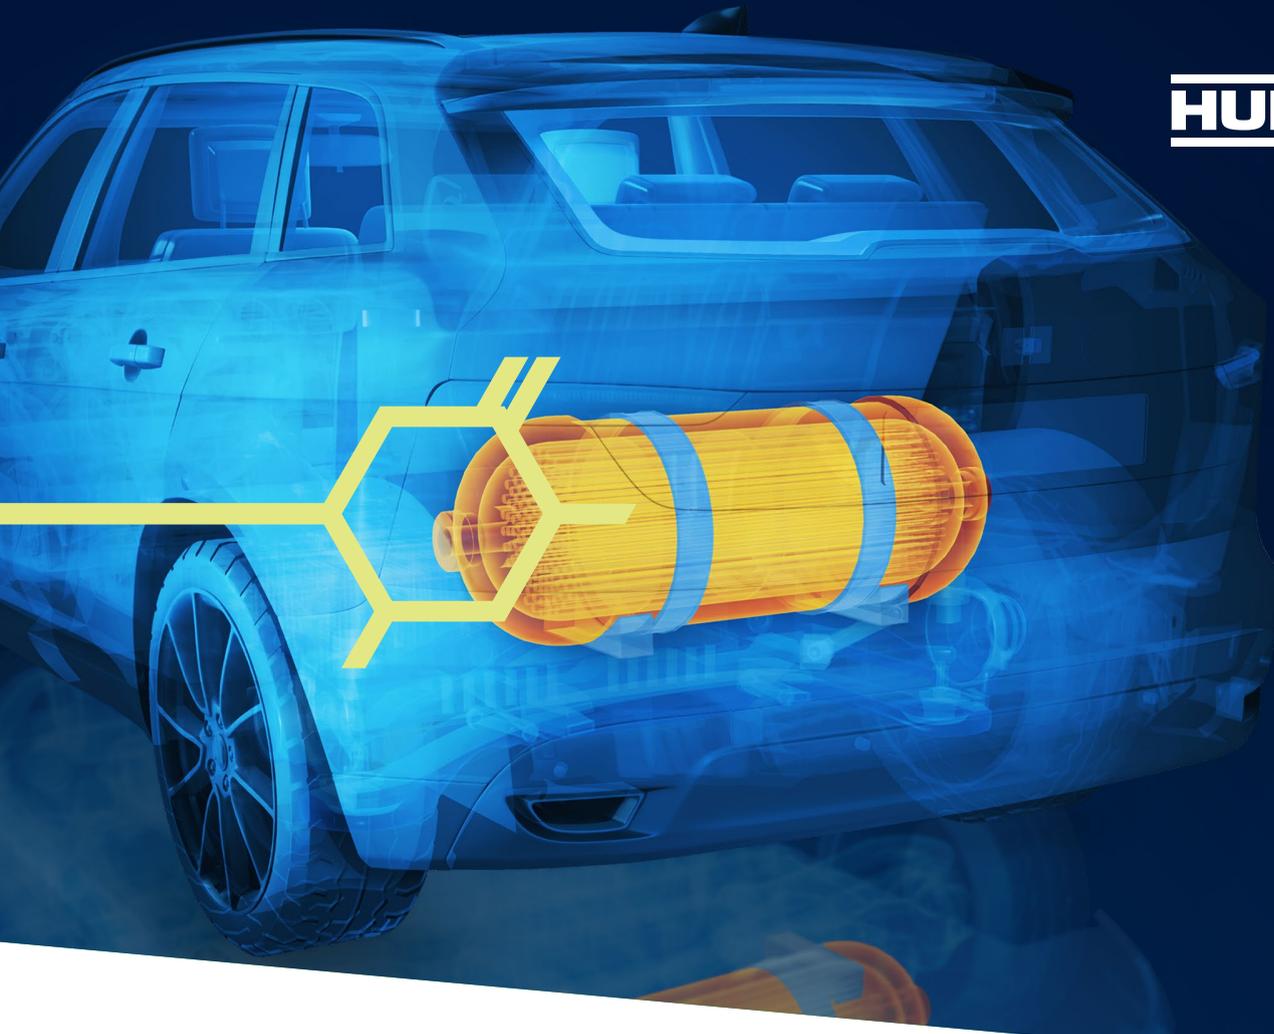

A TOUGH REGULATORY LANDSCAPE

The emergence of hydrogen storage has led to technical challenges, especially considering the increased pressure requirements that can range from 350-700 bars. Today, the Global Technical Regulation for Hydrogen and Fuel Cell Vehicles (GTR No. 13) demands not only pressure testing with high safety margins, but also impact resistance, chemical exposure, and numerous temperature-pressure cycling tests, as shown in figure 2.

MEETING STRINGENT REQUIREMENTS

The pressure resistance of hydrogen vessels is mainly governed by the reinforcement fibres, but the resin matrix plays a key role in providing environmental exposure protection (thermal, chemical, impact) as well as fatigue/pressure-cycling resistance to withstand the filling and emptying cycles.

The severe pressure cycling test at 85°C, required by the GTR 13 standard, means that in practice, resin systems must have a glass transition temperature (T_g) of at least 115-120°C to avoid premature failure, even in hot/wet conditions.

Studies have shown that resin systems featuring high mechanical strength and high elongation at break can better support dimensional changes (strain) induced by pressure cycling, preventing crack initiation within the laminate even at maximum rated pressure. In addition, a high fracture toughness can enhance fatigue performance and impact resistance by reducing damage initiation and crack propagation. Standard epoxy systems have fracture toughness (K_{Ic}) values around 0.7 to 0.9 MPa.m^{1/2}, whereas Huntsman's toughened epoxy systems can offer values as high as 1.7 MPa.m^{1/2}, significantly improving pressure cycle and impact performance.

Advanced Materials

Static, dynamic, and hot/wet performance of both the pure resin and composite parts can be fully characterized in Huntsman Advanced Material's ISO 17025-accredited laboratories. The key properties of several toughened ARALDITE® systems for pressure vessel manufacture are shown in table 1:

Resin system	ARALDITE® LY 3608 / ARADUR® 917-1 / Acc 960-1	ARALDITE® LY 3708 / ARADUR® 1571 / Acc 1575	ARALDITE® LY3508 / ARADUR® 3478
Process	Wet filament winding	Towpreg filament winding	RTM
Cure cycle	2 hrs 80°C + 2 hrs 110°C	30 mins 140°C	20 mins 100°C + 2 hrs 130°C
Tg (°C) DSC Midpoint, ISO 11357-2	120	132	115
Tensile strength (MPa) ISO 527	75	77	70
Fracture toughness K _{1c} (MPa.m ^{1/2}) ISO 13586	1.58	1.55	1.70

Table 1: Key properties of ARALDITE® resin systems

A RANGE OF MANUFACTURING PROCESSES

Wet filament winding is a well-established manufacturing method, but increasingly resin injection (resin transfer molding, RTM) and towpreg winding are considered in order to meet the need for increased productivity and greater part consistency.

The RTM process consists of forming a braided fibre preform over an inliner, followed by fast injection of a fast cure resin system within a closed mould. Whilst equipment investment and process complexity may be high, there can be advantages for mass production of smaller pressure vessels.

Towpreg filament winding (using a pre-impregnated fibre tow) is gaining popularity for mass production of hydrogen tanks, mainly due to clean processing, improved part quality, fast winding speeds, and short cure cycles. Towpregs can be manufactured in-situ, with equipment available for speeds up to 100 m/min, which is both cost-effective and limits cold transportation and storage issues. Towpreg resin systems must

offer low initial viscosity for fast impregnation, high storage stability at 23°C and the correct level of tack to enable bobbin unwinding and subsequent mandrel winding up to 5m/s without slippage. Curing can be via the classical oven process or by infra-red exposure. Prototypes have demonstrated that hydrogen vessels made with an ARALDITE® towpreg system can be cured as quickly as 30 minutes, whilst still providing the required toughness and hot/wet performance.

FASTER, MORE ROBUST PROCESSING

Achieving short cycle times whilst properly curing laminates up to 50 mm thickness can be a real challenge. The exothermic curing reaction can lead to temperature overshoots, damaging thermoplastic liners and creating high internal stresses. Definition of cure cycles often requires a large number of experimental trials and may never be fully optimized.

Simulation provides a valuable tool to quickly assess the effects of changes to cure cycles, gaining insight into all

	Wet filament winding	Towpreg filament winding	RTM
Main features	<ul style="list-style-type: none"> Well-established technology and production equipment Winding speed of 1-2 m/s max. Range of winding angles 	<ul style="list-style-type: none"> Clean process Fast winding speed (> 5 m/s) Controlled and consistent resin content Variable winding speed (fast on hoops, slower on domes) Range of winding angles Optimized winding patterns High reproducibility Short cure times (down to 30 mins) Out life between 1 week and 1 month at room temperature 	<ul style="list-style-type: none"> Clean process Fast injection versus filament winding operations Fast cure in mold (20 mins) Ideal for small sized vessels High laminate quality (low porosity content) High investment (braiding, molds, press, dosing equipment) Higher resin content than towpreg and FW

Table 2: Process features for composite pressure vessel manufacturing

areas of the simulated part. Providing that a detailed material data model is available, accurate predictions of exotherm temperature, degree of cure and Tg can be made.

Figures 3 and 4 below shows how simulation makes it possible to visualize the temperature evolution at any point during curing of the pressure vessel. Tg build-up and degree of cure can be visualized in a similar manner (figure 5).

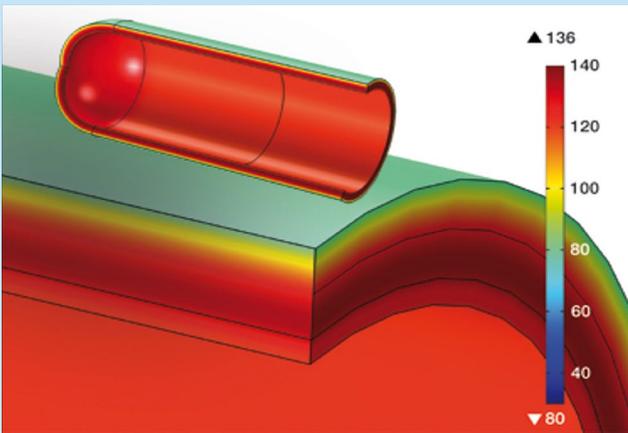


Figure 3: Temperature prediction through thickness during curing

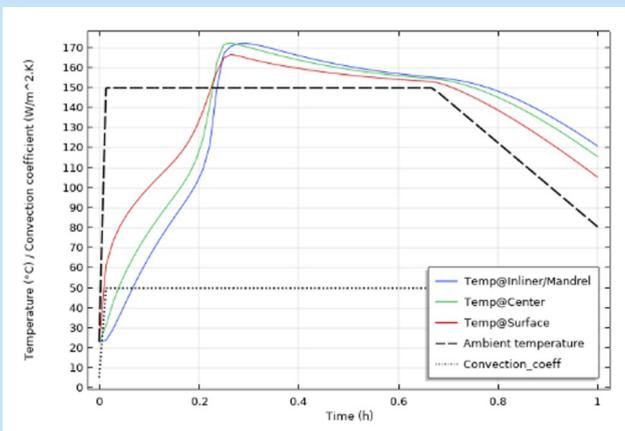


Figure 4: Temperature prediction of a pressure vessel cured at 150°C

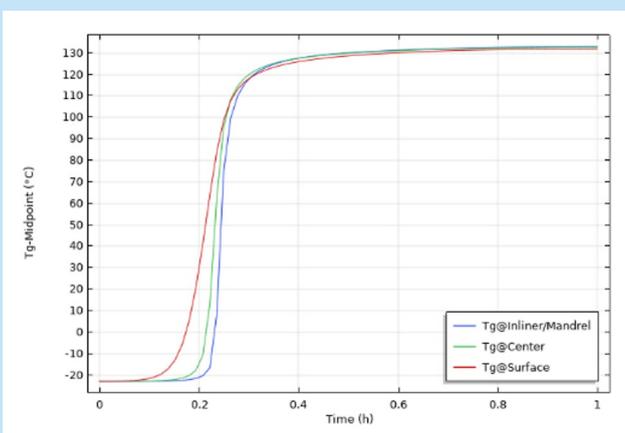


Figure 5: Tg build-up prediction for a pressure vessel cured at 150°C

Huntsman has developed in-house expertise not only in the complex material characterization needed to generate an accurate data model, but also in cure simulation of real customer parts, providing tailored guidance for process optimization.

AN EXPERIENCED PARTNER

Building on strong experience in natural gas pressure-vessel technology, Huntsman Advanced Materials can offer a comprehensive range of epoxy resin systems that address the emerging challenges and manufacturing requirements for hydrogen storage. In addition, expertise in material characterization and process simulation offer a powerful tool to accelerate product development and optimize manufacturing, leading to increased part quality and minimum production cycle times.

About Huntsman:

Huntsman Corporation is a publicly traded global manufacturer and marketer of differentiated and specialty chemicals with 2020 revenues of approximately \$6 billion. Our chemical products number in the thousands and are sold worldwide to manufacturers serving a broad and diverse range of consumer and industrial end markets. We operate more than 70 manufacturing, R&D and operations facilities in approximately 30 countries and employ approximately 9,000 associates within our four distinct business divisions. For more information about Huntsman, please visit the company's website at www.huntsman.com

Social Media:

Twitter: www.twitter.com/Huntsman_Corp

Facebook: www.facebook.com/huntsmancorp

LinkedIn: www.linkedin.com/company/huntsman

Forward-Looking Statements:

Certain information in this release constitutes forward-looking statements within the meaning of Section 27A of the Securities Act of 1933 and Section 21E of the Securities Exchange Act of 1934. These statements are based on management's current beliefs and expectations. The forward-looking statements in this release are subject to uncertainty and changes in circumstances and involve risks and uncertainties that may affect the company's operations, markets, products, services, prices and other factors as discussed under the caption "Risk Factors" in the Huntsman companies' filings with the U.S. Securities and Exchange Commission. Significant risks and uncertainties may relate to, but are not limited to, volatile global economic conditions, cyclical and volatile product markets, disruptions in production at manufacturing facilities, reorganization or restructuring of Huntsman's operations, including any delay of, or other negative developments affecting the ability to implement cost reductions, timing of proposed transactions, and manufacturing optimization improvements in Huntsman businesses and realize anticipated cost savings, and other financial, economic, competitive, environmental, political, legal, regulatory and technological factors. The company assumes no obligation to provide revisions to any forward-looking statements should circumstances change, except as otherwise required by applicable laws.

ARALDITE® is a registered trademark of Huntsman Corporation or an affiliate thereof in one or more, but not all, countries. ©Copyright 2021. Huntsman Corporation or an affiliate thereof. All rights reserved.