


Araldite®

Encapsulants and impregnation resins for e-motor

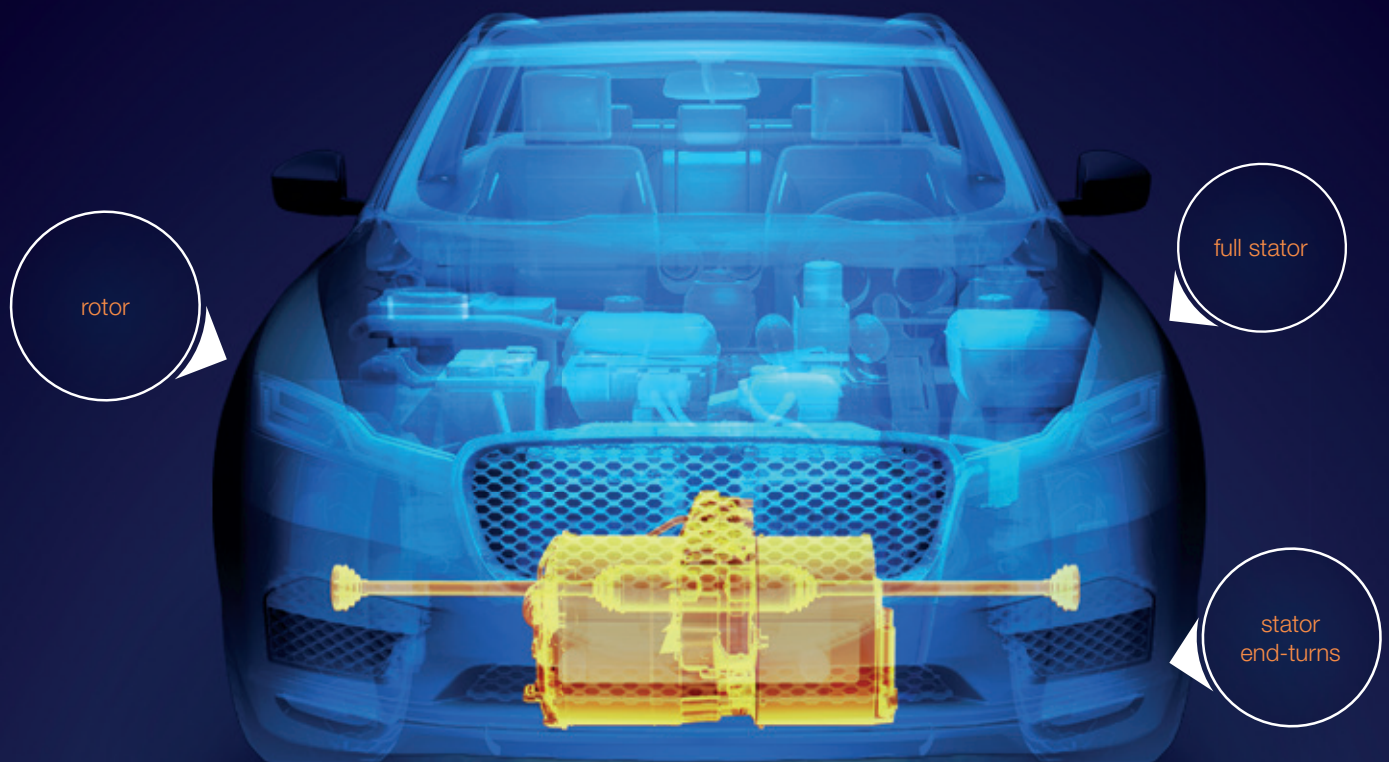

Araldite® encapsulants and impregnation resins for e-motor improve heat dissipation and extend lifetime

Araldite® encapsulants and epoxy impregnation resins increase performance of rotor, full stator and stator end-turns

Key features

- > High thermal conductivity
- > Excellent thermal endurance
- > Excellent impregnation and fast gap filling
- > High crack resistance
- > Excellent chemical resistance
- > Tailored for fast processing

Araldite®

Encapsulants and impregnation resins for e-motor

Encapsulant for stator end-turns Araldite® CW 2731	Encapsulant for rotors Araldite® CW 30386 / Aradur® HW 30387	Encapsulant for stators Araldite® CW 30334 / Aradur® HW 30335
Glass transition temperature (Tg) 165°C	Glass transition temperature (Tg) 200°C	Glass transition temperature (Tg) 100°C
Thermal conductivity 3.0 W/(m-K)	Thermal conductivity 0.7 W/(m-K)	Thermal conductivity 1.2 W/(m-K)
1-c epoxy system for end-turn encapsulation. Very high thermal conductivity and endurance. Excellent resistance to atmospheric and chemical degradation.	High Tg and lowest thermal expansion within the complete operation range. Very high thermal and chemical endurance. Fast gel and cure times.	Well balanced properties: good heat conductivity, very good crack resistance, media and thermal resistance. Excellent flow properties allow for fast filling times and good impregnation.
Encapsulant for stators Araldite® CW 30407 / Aradur® HW 30408	Encapsulant for stators Araldite® CW 30407 / Aradur® HW 30409	Encapsulant for stators Araldite® CW 30326 / Aradur® HW 30327
Glass transition temperature (Tg) 70°C	Glass transition temperature (Tg) 70°C	Glass transition temperature (Tg) 115°C
Thermal conductivity 1.1 W/(m-K)	Thermal conductivity 0.8 W/(m-K)	Thermal conductivity 0.7 W/(m-K)
Good flow properties and fast curing times (<1h at 120°C). Very good crack resistance and high heat conductivity of 1.1 W/(m-K). Anhydride-free.	Excellent flow properties and fast curing times (<1h at 120°C). Very good crack resistance and low density. Anhydride-free.	Good gap filling capability and heat conductivity. Toughened resin with reinforcing fillers for superior crack and thermoshock resistance. Very high thermal and chemical endurance.
2-c system for trickle impregnation Araldite® CY 38340 / Aradur® 38341	1-c system for trickle impregnation Araldite® 38500	1-c system for dipping impregnation Araldite® 38600
Glass transition temperature (Tg) 140°C	Glass transition temperature (Tg) 160°C	Glass transition temperature (Tg) 90°C
Thermal conductivity 0.2 W/(m-K)	Thermal conductivity 0.2 W/(m-K)	Thermal conductivity 0.2 W/(m-K)
2-c epoxy system for trickle impregnation and shelf life of many years. Fast cure times at low temperatures. High toughness and good adhesion.	1-c epoxy system for trickle impregnation. Fast cure times and high Tg. Improved wetting and adhesion to primary insulation.	1-c epoxy system for dipping impregnation. Low bath viscosity and high bath stability. Flexible system with improved crack resistance.

Learn more on www.huntsman-emobility.com

For any other information, please send an e-mail to advanced_materials@huntsman.com

Europe, Middle East, Africa & India +41 61 299 1111 Asia Pacific +86 21 3357 6588 Americas +1 888 564 9318



Registered for
REACH

Legal information All trademarks mentioned are either property of or licensed to Huntsman Corporation or an affiliate thereof in one or more, but not all, countries. Sales of the product described herein ("Product") are subject to the general terms and conditions of sale of either Huntsman Advanced Materials LLC, or its appropriate affiliate including without limitation Huntsman Advanced Materials (Europe) BVBA, Huntsman Advanced Materials Americas Inc., or Huntsman Advanced Materials (Hong Kong) Ltd. or Huntsman Advanced Materials (Guangdong) Ltd. ("Huntsman"). The following supercedes Buyer's documents. While the information and recommendations included in this publication are, to the best of Huntsman's knowledge, accurate as of the date of publication, NOTHING CONTAINED HEREIN IS TO BE CONSTRUED AS A REPRESENTATION OR WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHTS, OR WARRANTIES AS TO QUALITY OR CORRESPONDENCE WITH PRIOR DESCRIPTION OR SAMPLE, AND THE BUYER ASSUMES ALL RISK AND LIABILITY WHATSOEVER RESULTING FROM THE USE OF SUCH PRODUCT, WHETHER USED SINGLY OR IN COMBINATION WITH OTHER SUBSTANCES. No statements or recommendations made herein are to be construed as a representation about the suitability of any Product for the particular application of Buyer or user or as an inducement to infringe any patent or other intellectual property right. Data and results are based on controlled conditions and/or lab work. Buyer is responsible to determine the applicability of such information and recommendations and the suitability of any Product for its own particular purpose, and to ensure that its intended use of the Product does not infringe any intellectual property rights. The Product may be or become hazardous. Buyer should (i) obtain Material Safety Data Sheets and Technical Data Sheets from Huntsman containing detailed information on Product hazards and toxicity, together with proper shipping, handling and storage procedures for the Product, (ii) take all steps necessary to adequately inform, warn and familiarize its employees, agents, direct and indirect customers and contractors who may handle or be exposed to the Product of all hazards pertaining to and proper procedures for safe handling, use, storage, transportation and disposal of and exposure to the Product and (iii) comply with and ensure that its employees, agents, direct and indirect customers and contractors who may handle or be exposed to the Product comply with all safety information contained in the applicable Material Safety Data Sheets, Technical Data Sheets or other instructions provided by Huntsman and all applicable laws, regulations and standards relating to the handling, use, storage, distribution and disposal of and exposure to the Product. Please note that products may differ from country to country. If you have any queries, kindly contact your local Huntsman representative.

© 2020 Huntsman Corporation. All rights reserved. Ref. No. AdMat Araldite® Encapsulants for e-motor_01_20_EN_EU